

Seal for wall fittings

Product description

Gluing on one side

Diameter approx. 6 cm


Foamed plastic seal (grey)

Intended uses:

Sealing your wall fittings
in the sanitary area
Prevents moisture from
penetrating into the masonry,
plaster and dry construction

Conclusion:

**Still wet just now – now already
tight!**

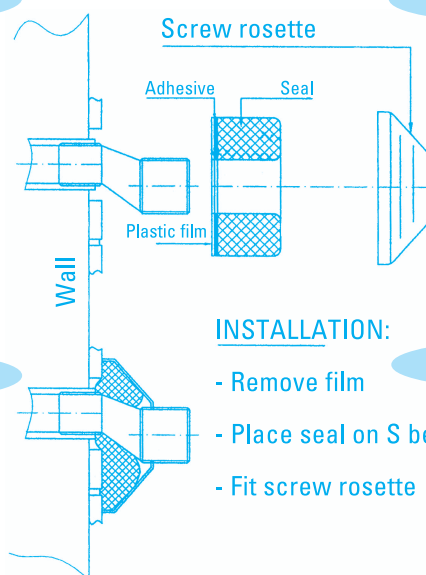

INSTALLATION:

- Remove film
- Place seal on S bend
- Fit screw rosette

Installation instructions

Pull off protective adhesive film
Apply to the place to be sealed
Screw rosette on

Conclusion:

1, 2, TIGHT - FINISHED

Important:

No more wall closing with silicone
(cuts unnecessary costs)

Neu **sealing
technology**

for wall fittings

Fermit GmbH

Zur Heide 4 • 53560 Vettelschoss
Tel: +49(0)2645 - 2207 / Fax: +49(0)2645 - 3113

www.fermit.de